




Solucinde

ELECTRONIC FEEDERS

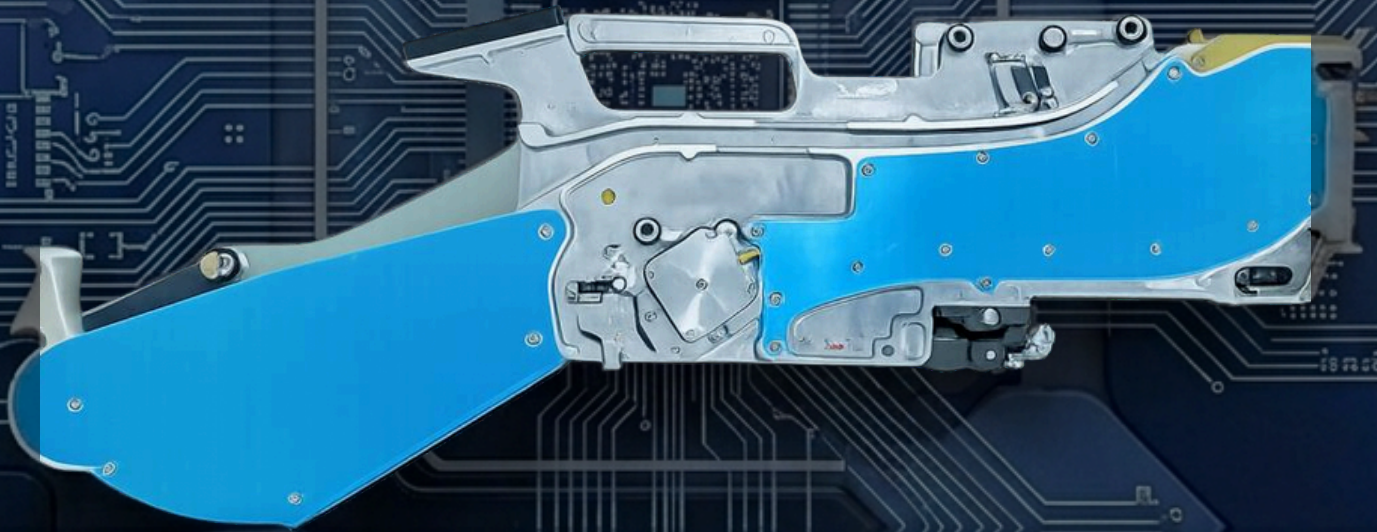


V8 Quick Start Guide

To facilitate your use, our company has specifically provided this user manual, which includes operation guidelines, functional introductions, daily maintenance instructions, and precautions. Please read the manual carefully before use.


I. Operation Guide

Step One

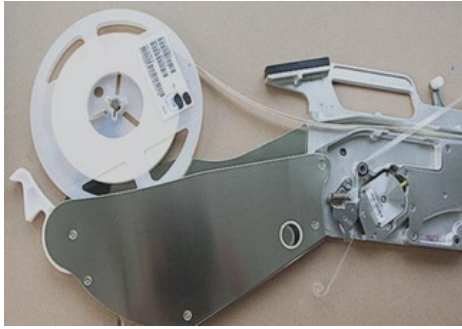

1. Open the bracket.
2. Insert the material tray into the fixed shaft.
3. Retract the bracket and guide the material tray into the pallet.

Step Two

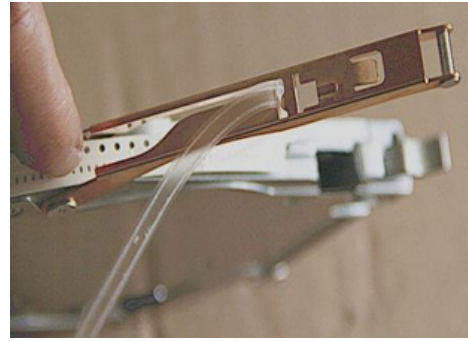

1. Pass the tape through the guide cover.
2. Lay the tape film smoothly into the divider opening.
3. Align the tape holes and tape teeth of the tape.

Step Three




Fix the tape with the left hand

Step Four




Press the guide cover into the locking hook with the right hand.

Step Five

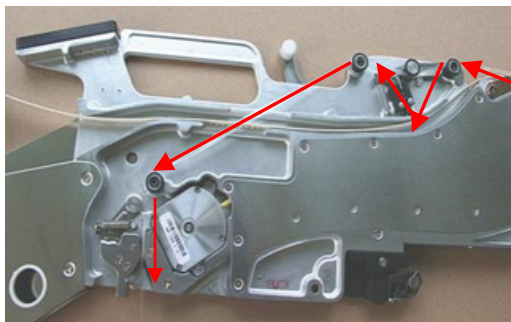

Place the film smoothly in the direction of the arrow onto the roller

Step Six

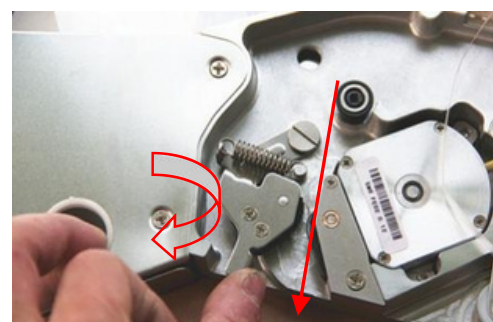

Open the material receiving mechanism and smoothly press the material film into

II. Function Introduction



1. It can display three step ranges: 1mm, 2mm, and 4mm.
2. Adjust the suction position according to (A).
3. Each press of ▼ retracts the tape feeder by one step, and all other button functions are disabled. To enable other functions, a press of ▲ is required.
4. Each time it is pressed three times (P), it switches once
5. Tighten the (O) material film
6. Each time the ▲ is pressed, the tape advances once.

The aforementioned functions must be operated after power is supplied


III. Routine Maintenance

Check if there are any foreign objects on the tool gun base; if present, clean them promptly


The guide cover's material film area requires frequent cleaning with alcohol to remove adhesive residue.

Blow out the material outlet with an air gun to prevent foreign objects from blocking

This screw must not be disassembled

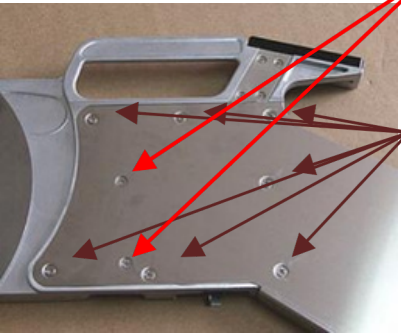

Remove the 9 screws from both the front and back of the tray, then take off the tray.

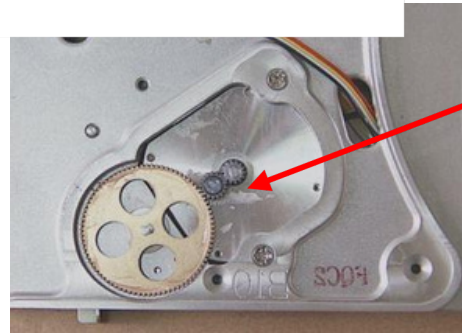

The gear for the motor-driven belt should be lubricated every six months.

IV. Precautions

1. Maintain the material gun in a dry and clean condition by preventing moisture, water, and dust ingress.
2. Do not stack or pile; place it on a dedicated material cart.
3. Strictly prohibit impacts and collisions. Use an air gun to prevent foreign objects from blocking

CONTACT



VENTAS@SOLUCINDE.COM

IF YOU WOULD LIKE
A QUOTE, PLEASE
CONTACT US BY
SCANNING OUR
WHATSAPP QR CODE



WANT TO LEARN
MORE ABOUT OUR
SOLUTIONS? VISIT
OUR WEBSITE.



LOCATION MÉXICO

Zacatecas 503A, Huastecas de
Lampacitos, 88780 Reynosa, Tamaulipas

LOCATION USA

1124 N International blvd suite 650, Hidalgo
Texas 78557



Solucinde